

P7500I

Compact & Solid



FEATURES

- Inverter technology: stable power for safe operation of sensitive electronics.
- OHV engine provides consistent power for multiple applications.
- Low-oil level shutdown automatically safeguards engine from damage.
- Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.
- USB ports charges your mobile electronics so you can stay connected.
- Compact and Solid Canopy
- Easily transportable by handle.
- Ideal for applications requiring low noise
- Connector for Parallel kit
- Oil Bottle, Funnel and Plugs Included in the carton box

POWERRUSH

MORE STARTING CAPACITY ALLOWING YOU TO DO MORE WITH LESS.
Powerrush increases electrical current upon demand, above rated output when starting electric motors.



PERFORMANCE

| | | |
|-------------|-------|------|
| Frequency | Hz | 50 |
| Voltage | V | 230 |
| Phase | | 1 |
| Max Power | Watts | 7000 |
| Rated Power | Watts | 6500 |



Engine


| | | |
|-------------------------|--------------------|----------|
| Engine Brand | Pramac | |
| Type | OHV | |
| Exhaust emission level | Stage V | |
| Operating Speed Nominal | rpm | Variable |
| Fuel | Petrol | |
| Starting Systems | Electric (+Recoil) | |
| Oil capacity | l | 1.45 |
| Low Oil Shutdown | √ | |

Alternator

| | |
|---------------------------|----------|
| Voltage regulation system | Inverter |
|---------------------------|----------|


Dimensional data

| | | |
|----------------------------|--------|--------------|
| Length | (L) mm | 950 |
| Width | (W) mm | 765 |
| Height | (H) mm | 773 |
| Dry weight | kg | 146 |
| Carton box dimension LxWxH | mm | 1010x660x742 |

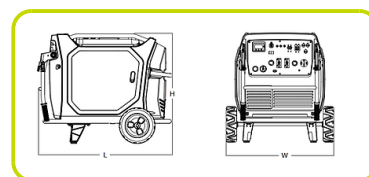

Autonomy

| | | |
|----------------------|-----|------|
| Fuel tank capacity | | 25 |
| Fuel consumption 75% | l/h | 2.25 |
| Running time 75% | h | 11 |

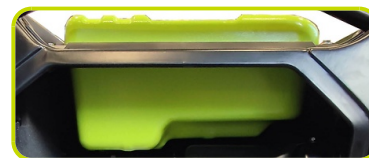

Noise level

| | | |
|------------------------------|-------|----|
| Guaranteed noise level (LWA) | dB(A) | 92 |
| Noise pressure level @ 7 m | dB(A) | 64 |

GENSET CONTROL

COMMANDS / INSTRUMENTATION

- Selector switch: O/I | Power Button
- Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.

- Outputting energy (light - Green)
- Overloading and Oil alarming (light - Red)
- Voltmeter / Hourmeter / Frequency meter / Fuel Gauge
- Parallel kit receptacles

PROTECTIONS

- Over-load, Oil Guard, Short Circuit, High temperature, Over-speed protections
- Protection Control panel IP 44

OUTPUT:

- n°2 USB DC 5V 2A



SOCKET TYPE

| | |
|------------------------|---|
| SCHUKO 230V 16A IP44 | 2 |
| 2P+T CEE 230V 32A IP44 | 1 |

The information is aligned with the Data file at the time of download. Printed on 31/01/2024 (ID 19635)

©2024 | PR Industrial S.r.l unipersonale – Loc. Il Piano – 53031 Casole d'Elsa (SI) – ITALY. Company subject to the management and coordination of Generac Power Systems Inc. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

